

±1888

Product Guide

DM-Series
711.U.001.01

Digital Panel Meters, Standard

96x48

- ✓ for DC Current and Voltage
- ✓ for AC Current and Voltage
- ✓ for Standard Signals
- ✓ Bezel 96x48 mm
- ✓ Digit Height 14 mm
- ✓ LED red
- ✓ 3½ Digits
- ✓ Auxiliary Supply AC 115/230 V, 50 Hz



WEIGEL

**Digital Panel Meters,
Standard****Application**

for standard applications in switchboard-, control equipment-, process control-, and machine tool industry.

for mounting in	switchboards, machine tools or mosaic grid panels (optional)
for measuring	DC current or DC voltage, AC current or AC voltage
connection	direct or for use on transducer, shunt, transformer

Mechanical Data

case details	rectangular format
material of case	glass-fibre reinforced thermoplastics, black
bezel	black, mat or optionally gray varnished (similar to RAL 7037) or siliceous gray (similar to RAL 7032)
terminals	screw terminal barrier strip
enclosure code	IP 50 front IP 20 rear of case
panel fixing	screw clamps
mask lettering	caption, custom logo or extra lettering to special order
operating elements	behind removable display lens; for model DMA 14 - 31A20R - S3 on rear side
climatic suitability	
operating temperature range	0°C ... +23°C ... +50°C
storage temperature range	-20°C ... +23°C ... +70°C
relative humidity	≤ 75% annual average, non-condensing
dimensions (in mm)	DMA 14
bezel	96 x 48
panel cutout	92 ^{+0.8} x 45.0 ^{+0.6}
panel thickness	≤ 45
mounting depth	120 incl. terminal barrier strip
bezel height	8
weight approx.	0.35 kg

Options

caption	please specify
extra lettering	please specify
logo on the lens	please specify
special measuring range	on request
factory calibration	please specify
non-standard auxiliary voltage	on request
enclosure code	IP 54 up to IP 65 meter front using rubber cover attachment 96x48
mounting in mosaic grid panels	please specify type/manufacturer of mosaic grid when ordering.

<i>additional options</i>	on request
<i>additional data</i>	on request
<i>prices</i>	refer to Price Sheet No. 711.P.000.##

**Digital Panel Meters,
Standard****DMA 14**

Input A
Input D
Input E
Input C
Input F
96 x 48 mm

Input

A - S1	DC Current 20 / 200 mA and DC Voltage 2 / 10 / 40 / 200 V
D - S1	DC Voltage 60 / 125 / 150 / 300 mV
E - S1	DC Current 20 / 200 mA and DC Voltage 2 / 10 / 40 / 200 V zero shifting
C - S1	DC Current 0/4 ... 20 mA and DC Voltage 0 ... 10 V
F - S	AC Current 3 / 6 A and AC Voltage 2 / 100 / 250 / 500 V
A - S3	DC Voltage 0 ... 20 V unipolar

mA / V =	DMA	14	-	31	A	20	R	-S1	
mV =	DMA	14	-	31	D	20	R	-S1	
mA / V = zero point	DMA	14	-	31	E	20	R	-S1	
standard signal	DMA	14	-	31	C	20	R	-S1	
A / V ~	DMA	14	-	31	F	20	R	-S	
20 V=	DMA	14	-	31	A	20	R	-S3	

±1888
mA, V
mV

Short Form Data

Digital Panel Meters for DC Current and DC Voltage (mA, V / mV)

DMA 14

Input A
Input D
96 x 48 mm

Digits	31	3½ digits
Input	A	DC Current 20 / 200 mA and DC Voltage 2 / 10 / 40 / 200 V
	D	DC Voltage 60 / 125 / 150 / 300 mV
Auxiliary Voltage	20	115/230 V AC, 50 Hz electr. insulated
Display Colour	R	red
Variant	-S1	adjustment by potentiometer and jumper behind display lens.

Electrical Data

measuring ranges

input A	input D	input D	input D
DC current	input resistance	DC voltage	input resistance
±20 mA	110 Ω		
±200 mA	10 Ω		
DC Voltage			
±2 V	60 kΩ	±60 mV	60 kΩ
±10 V	270 kΩ	±125 mV	140 kΩ
±40 V	1 MΩ	±150 mV	160 kΩ
±200 V	4.7 MΩ	±300 mV	330 kΩ

measuring principle	dual-slope, integrating
conversion rate	approx. 1 read per second
error, max.	±0.1% of reading, ±1 count
auxiliary voltage	AC 115/230 V, 50 Hz, electrically insulated
power consumption	4 VA max.


Display

display	7-segment LED, 14 mm, red
display span	-1999 ... +1999 counts
zero point	for input A fixed for input D programmable from -50 up to +50
end value	programmable
polarity sign	only - or ± programmable
decimal point	programmable
blanked display	programmable for 1 st digit (right-side)
overrange indication	polarity display will flash, remaining numeric segments blanked

Connection

plug-in terminal barrier strip

input A

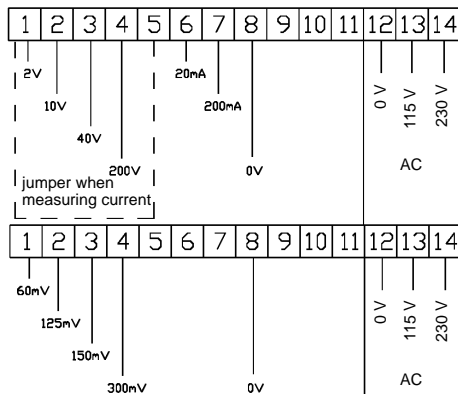

ordering example **DMA 14 - 31 A 20 R -S1**

±1888
mA, V

Short Form Data

Digital Panel Meters for DC Current and DC Voltage Zero Point Shifting

DMA 14

Input E
Input C
96 x 48 mm

Digits	31	3½ digits
Input	E	DC Current 20 / 200 mA and DC Voltage 2 / 10 / 40 / 200 V
	C	DC Current 0/4 ... 20 mA and DC Voltage 0 ... 10 V
Auxiliary Voltage	20	115/230 V AC, 50 Hz electr. insulated
Display Colour	R	red
Variant	-S1	adjustment by potentiometer and jumper behind display lens.

Electrical Data

measuring ranges

input E	input C	input C	input C
DC current	input resistance	DC current	input resistance
±20 mA	110 Ω	0/4 ... 20 mA	100 Ω
±200 mA	10 Ω		
DC voltage		DC voltage	
±2 V	160 kΩ	0 ... 10 V	160 kΩ
±10 V	740 kΩ		
±40 V	2.2 MΩ		
±200 V	12 MΩ		

zero point	for input C programmable from 2 up to 6 mA
measuring principle	dual-slope, integrating
conversion rate	approx. 1 read per second
error, max.	±0.1% of reading, ±1 count
auxiliary voltage	AC 115/230 V, 50 Hz, electrically insulated
power consumption	4 VA max.


Display

display	7-segment LED, 14 mm, red
display span	-1999 ... +1999 counts
zero point	for input E programmable from -500 up to +500
end value	programmable
polarity sign	only - or ± programmable
decimal point	programmable
blanked display	programmable for 1 st digit (right-side)
overrange indication	polarity display will flash, remaining numeric segments blanked

Connection

plug-in terminal barrier strip

input E

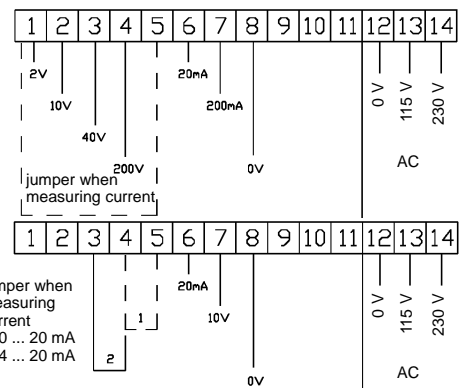

ordering example **DMA 14 - 31 C 20 R -S1**

±1888
A, V

Short Form Data

Digital Panel Meters for AC Current/Voltage, TRMS

DMA 14

Input F
96 x 48 mm

Digits

31 3½ digits

Input

F AC current 3 / 6 A and
AC voltage 2 / 100 / 250 / 500 V

Auxiliary Voltage

20 230 V AC, 50 Hz
electrically insulated

Display Colour

R red

Variant

-S adjustment by potentiometer and
jumper behind display lens.

Electrical Data


measuring ranges	input resistance
AC current	
3 A	20 mΩ
6 A	10 mΩ
AC voltage	
2 V	5 kΩ
100 V	270 kΩ
250 V	680 kΩ
500 V	1.3 MΩ
measuring principle	dual-slope, integrating, true RMS
conversion rate	approx. 1 read per second
error, max.	±0.2% of reading, ±1 count
auxiliary voltage	AC 115/230 V, 50 Hz, electrically insulated
power consumption	4 VA max.

Display

display	7-segment LED, 14 mm, red
display span	0 ... 1999 counts
zero point	programmable from 0 up to 20
end value	programmable
polarity sign	none
decimal point	programmable
blanked display	programmable for 1 st digit (right-side)
overrange indication	polarity display will flash, remaining numeric segments blanked

Connection

plug-in terminal barrier strip

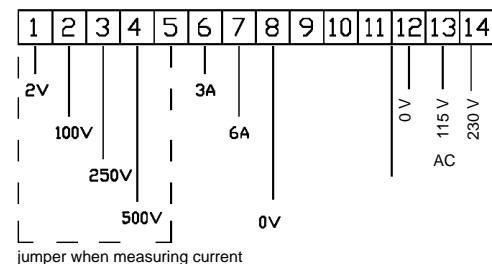

ordering example **DMA 14 - 31 F 20 R -S**

±1888
V

Short Form Data

Digital Panel Meters for DC Voltage (20V) Rear Potentiometer

DMA 14

Input A
96 x 48 mm

Digits

31 3½ digits

Input

A DC Voltage 0 ... 20 V unipolar

Auxiliary Voltage

20 230 V AC, 50 Hz
electrically insulated

Display Colour

R red

Variant

-S3 adjustment by potentiometer
on meter rear side

Electrical Data


measuring ranges	input resistance
DC voltage	
20 V	530 kΩ
measuring principle	dual-slope, integrating
conversion rate	approx. 1 read per second
error, max.	±0.1% of reading, ±1 count
auxiliary voltage	AC 230 V, 50 Hz, electrically insulated
power consumption	4 VA max.

Display

display	7-segment LED, 14 mm, red
display span	0 ... 1999 counts
zero point	fixed
end value	programmable
polarity sign	none
decimal point	programmable
blanked display	programmable for 1 st digit (right-side)
overrange indication	polarity display will flash, remaining numeric segments blanked

Connection

plug-in terminal barrier strip

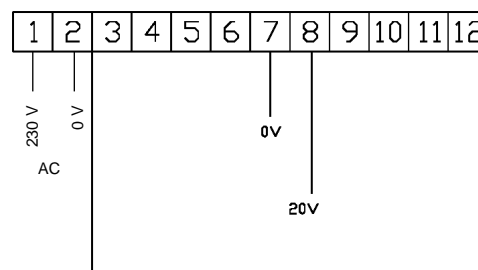

ordering example **DMA 14 - 31 A 20 R -S3**

WEIGEL – MESSGERÄTE GmbH

P.O.B. 720 154 • D-90241 Nürnberg • Telephone: 0911 / 423 47-0
Erlenstraße 14 • D-90441 Nürnberg • Telefax: 0911 / 423 47-39
Internet: <http://www.weigel-messgeraete.de>
e-mail: vertrieb@weigel-messgeraete.de



– specifications subject to change without notice; date of issue 06/97 –