


# Crane scale KERN HFC

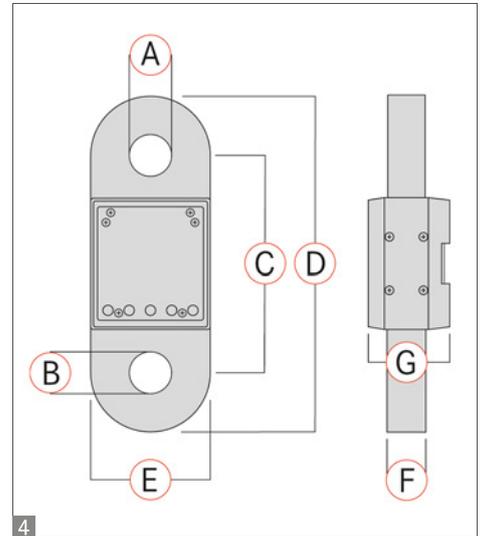

Compact crane scale for use in harsh environmental conditions or where space is limited, with convenient hand-held terminal

## Features

- **1** With the TÜV certification mark, the scale meets the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- With its high-quality finish, low weight and compact dimensions, this crane scale (tensile force gauge) is an essential device for industrial use, on building sites, in freight centres, ports etc.
- Because of its **compact design** it is also ideally suited for installation in systems where space is limited, etc.
- **Peak load display** (peak hold)
- **Hold function:** When the weighing value remains unchanged the weight indicated on the display is automatically „frozen“ until the HOLD key is pressed

- **Tare:** Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed
- **2 Display device with integrated radio module**, which the user can carry around with him, thanks to the convenient hand strap **3**. In this way the weighing data can always be read off the display device by the user, even when the user is a long way from the load receptor (force gauge) or under poor lighting conditions. Standard. Range up to 100 m. All functions can be selected. LCD display, digit height 23 mm, rechargeable battery pack internal, standard. Operating time up to 30 h without backlight, charging time approx. 12 h. Can be re-ordered, KERN HFC-A01
- Dimensions Housing (display device) WxDxH 88x64x256 mm
- Net weight approx. 0,5 kg


## Technical data

- Large backlit LCD display, digit height 23 mm
- Material and design of housing/load support, models with [Max] ≤ 3 t: aluminium/stainless steel bearing [Max] > 3 t: steel/steel
- Load lifting attachments: Optional battery operation, 3 x 1.5 V AA not included, operating time up to 40 h
- Precision: 0,2 % of [Max]
- Measuring frequency: 60 Hz
- Further weighing units: kg, lb, N
- Permissible ambient temperature 5 °C / 35 °C

## Accessories

- **5 Rechargeable battery pack internal** for load lifting attachments, operating time up to 15 h, charging time approx. 12 h, KERN HFA-A01

### STANDARD



### OPTION



only load support **2**

**5**

Model	Weighing range [Max] kg	Readout [d] g	Net weight approx. kg	4 Dimensions						Option	
				A = B	C	D	E	F	G	DAkkS Calibr. Certificate	DKD KERN
				mm	mm	mm	mm	mm	mm		
KERN HFC 1T-4	1000	500	1,7	27	165	255	90	30	55	963-130H	
HFC 3T-3	3000	1000	2,2	27	165	255	90	30	61	963-132H	
HFC 5T-3	5000	2000	3,9	30	165	255	90	30	61	963-132H	
HFC 10T-3	10000	5000	6,0	40	185	275	90	40	71	963-133H	

# KERN Pictograms:

 <b>Internal adjusting:</b> Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).	 <b>Piece counting:</b> Reference quantities selectable. Display can be switched from piece to weight.	 <b>Suspended weighing:</b> Load support with hook on the underside of the balance.
 <b>Adjusting program CAL:</b> For quick setting up of the balance's accuracy. External adjusting weight required.	 <b>Recipe level A:</b> Separate memory for the weight of the tare container and the recipe ingredients (net total).	 <b>Battery operation:</b> Ready for battery operation. The battery type is specified for each device.
 <b>Memory:</b> Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 <b>Recipe level B:</b> Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.	 <b>Rechargeable battery pack:</b> Rechargeable set.
 <b>Alibi memory:</b> Electronic archiving of weighing results, complying with the 2009/23/EC standard.	 <b>Recipe level C:</b> Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, adjustment of recipe when dosages are exceeded, multiplier function, barcode.	 <b>Universal mains adapter:</b> with universal input and optional input socket adapters for A) EU, GB B) EU, GB, CH, USA C) EU, GB, CH, USA, AUS
 <b>Data interface RS-232:</b> To connect the balance to a printer, PC or network.	 <b>Totalising level A:</b> The weights of similar items can be added together and the total can be printed out.	 <b>Mains adapter:</b> 230V/50Hz in standard version for EU. On request GB, USA or AUS version available.
 <b>RS-485 data interface:</b> To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.	 <b>Totalising level C:</b> Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, adjustment of recipe when dosages are exceeded, multiplier function, barcode recognition.	 <b>Power supply:</b> Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request.
 <b>USB data interface:</b> To connect the balance to a printer, PC or other peripherals.	 <b>Weighing principle: Strain gauge</b> Electrical resistor on an elastic deforming body.	 <b>Weighing principle: Tuning fork</b> A resonating body is electromagnetically excited, causing it to oscillate.
 <b>Bluetooth* data interface:</b> To transfer data from the balance to a printer, PC or other peripherals.	 <b>Percentage determination:</b> Determining the deviation in % from the target value (100 %).	 <b>Weighing principle: Electromagnetic force compensation</b> Coil inside a permanent magnet. For the most accurate weighings.
 <b>WLAN data interface:</b> To transfer data from the balance to a printer, PC or other peripherals.	 <b>Weighing units:</b> Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 <b>Weighing principle: Single cell technology</b> Advanced version of the force compensation principle with the highest level of precision.
 <b>Control outputs (optocoupler, digital I/O):</b> To connect relays, signal lamps, valves, etc.	 <b>Weighing with tolerance range:</b> Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.	 <b>Verification possible:</b> The time required for verification is specified in the pictogram.
 <b>Interface for second balance:</b> For direct connection of a second balance.	 <b>Hold function:</b> (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.	 <b>DAKkS calibration possible (DKD):</b> The time required for DAKkS calibration is shown in days in the pictogram.
 <b>Network interface:</b> For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.	 <b>Protection against dust and water splashes IPxx:</b> The type of protection is shown in the pictogram.	 <b>Package shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram.
 <b>Wireless data transfer:</b> between the weighing unit and the evaluation unit using an integrated radio module.	 <b>ATEX explosion protection:</b> Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.	 <b>Pallet shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram.
 <b>GLP/ISO log:</b> The balance displays the weight, date and time, regardless of a printer connection.	 <b>Stainless steel:</b> The balance is protected against corrosion.	 <b>Warranty:</b> The warranty period is shown in the pictogram.
 <b>GLP/ISO log:</b> With weight, date and time. Only with KERN printers.		

## KERN – Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAKkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAKkS calibration laboratory today is one of the most modern and best-equipped DAKkS calibration laboratories for balances, test weights and force-measurement in Europe.

Thanks to the high level of automation, we can carry out DAKkS calibration of

balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

### Range of services:

- DAKkS calibration of balances with a maximum load of up to 50 t
- DAKkS calibration of weights in the range of 1 mg – 2500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAKkS calibration certificates in the following languages D, GB, F, I, E, NL, PL

## Your KERN specialist dealer: