

Torque Wrench Calibrator

- **Accurate**
- **Easy-to-use**
- **Fast operation**
- **Economical solution**
- **Modular system**
- **Compact and portable**
- **Rugged and reliable**




The Mecmesin Torque Wrench Calibrator (TWC) is a versatile, easy-to-use system that verifies the torque applied by any type of 'click action', 'break back' or dial indicator torque wrench with ease. Based on the AFTI universal force and torque display and designed as a modular system, the TWC is the ultimate in flexibility. The standard system is supplied with its own dedicated transducer connected to the AFTI, but for added flexibility a range of different "smart" transducers are available to allow testing up to 720 lbf.ft (1000 N.m)

Three operating modes cover all common testing requirements. 'Normal' mode shows the live value, 'First Peak' mode records the true 'click torque' and 'Max' mode records the highest value. The TWC is easily reset using the push button torque zeroing facility.

Battery-powered, the TWC is a portable instrument ideal for use in calibration laboratories and production lines. It also has a built-in RS232 interface to download data to a printer or PC for further statistical analysis.


TWC shown testing a mechanical torque wrench

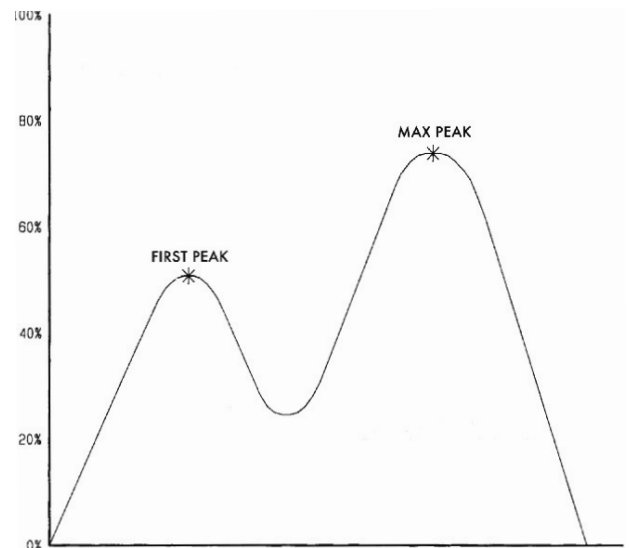

First Peak and Max Peak modes

accurate
portable
easy-to-use

Dimensions mm (inch)

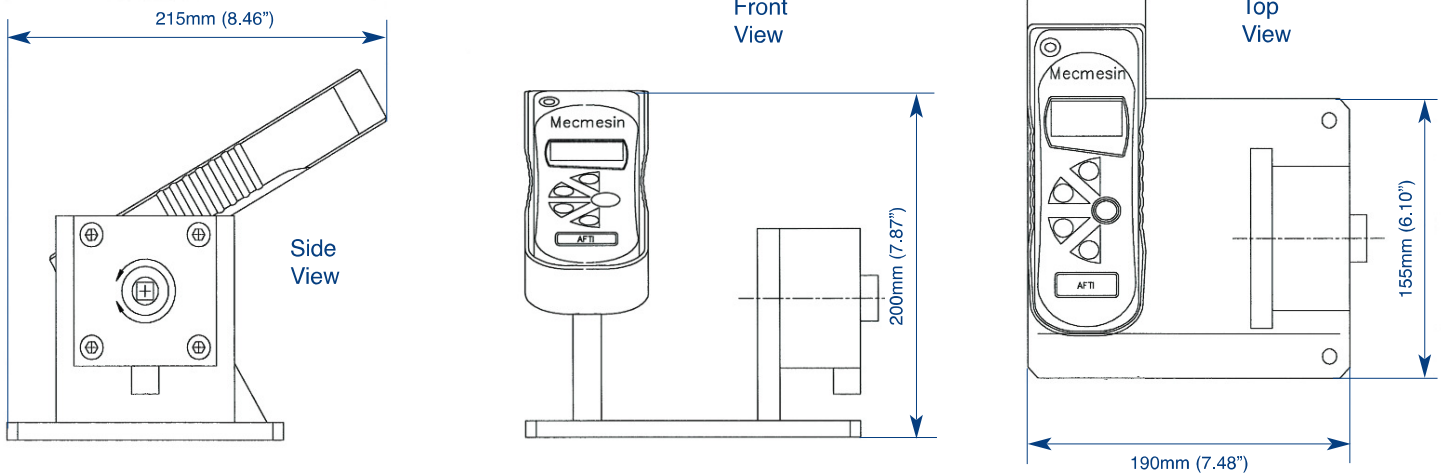

Specifications

Model	Rated Torque Range (F.S.D)	Resolution					
		N-m	kg-m	kg-cm	lb-ft	lb-in	SQ. drive
TWC 1	15 N.m / 11 lb-ft	15 x 0.003	1.5 x 0.0003	150 x 0.03	11 x 0.003	130 x 0.03	3/8"
TWC 2	60 N.m / 44 lb-ft	60 x 0.02	6 x 0.002	600 x 0.2	44 x 0.009	520 x 0.2	3/8"
TWC 3	100 N.m / 72 lb-ft	100 x 0.02	10 x 0.002	1000 x 0.2	72 x 0.02	870 x 0.2	1/2"
TWC 4	150 N.m / 110 lb-ft	150 x 0.03	15 x 0.003	1500 x 0.3	110 x 0.03	1300 x 0.3	1/2"
TWC 5	600 N.m / 440 lb-ft	600 x 0.2	60 x 0.02	6000 x 2.0	440 x 0.09	-	3/4"
TWC 6	1000 N.m / 720 lb-ft	1000 x 0.2	100 x 0.02	10000 x 2.0	720 x 0.2	-	1"
Standard Accuracy:		± 0.5% of full scale					
AFTI Specifications							
Operating Temperature:		68°F to ±36°F (20°C ± 2°C)					
Output:							
RS232-C:		8 data bits, 1 Start bit, 1 Stop bit, no parity					
Digimatic							
Analogue							

Mecmesin reserves the right to alter equipment specifications without prior notice

North America Mecmesin Corporation

45921 Maries Road, Suite 120,
Sterling, Virginia 20166, U.S.A

e: info@mecmesincorp.com
t: 703 433 9247 f: 703 444 9860

www.mecmesincorp.com

datasheet ref: 431-018-01-L01